

PRESIDENT

is powered with a batterie 12 or 24 V

HARRY III ASC 12/24 V



- Memorization of a priority channel • NB filter
- Vox (hands free function) • Up/Down Micro
- Roger Beep • Scan function • AM/FM
- Large display with LCD • Hi-Cut filter
- Lock function • Key beep...



*See warranty conditions on our website: www.president-electronics.com

Groupe
PRESIDENT
ELECTRONICS
since 1978

1604/03-15 C0336


S.A. Capital 10.000.000 €

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC

Site : <http://www.president-electronics.com> – e-mail : groupe@president-electronics.com



HARRY III ASC 12/24 V *Functions*

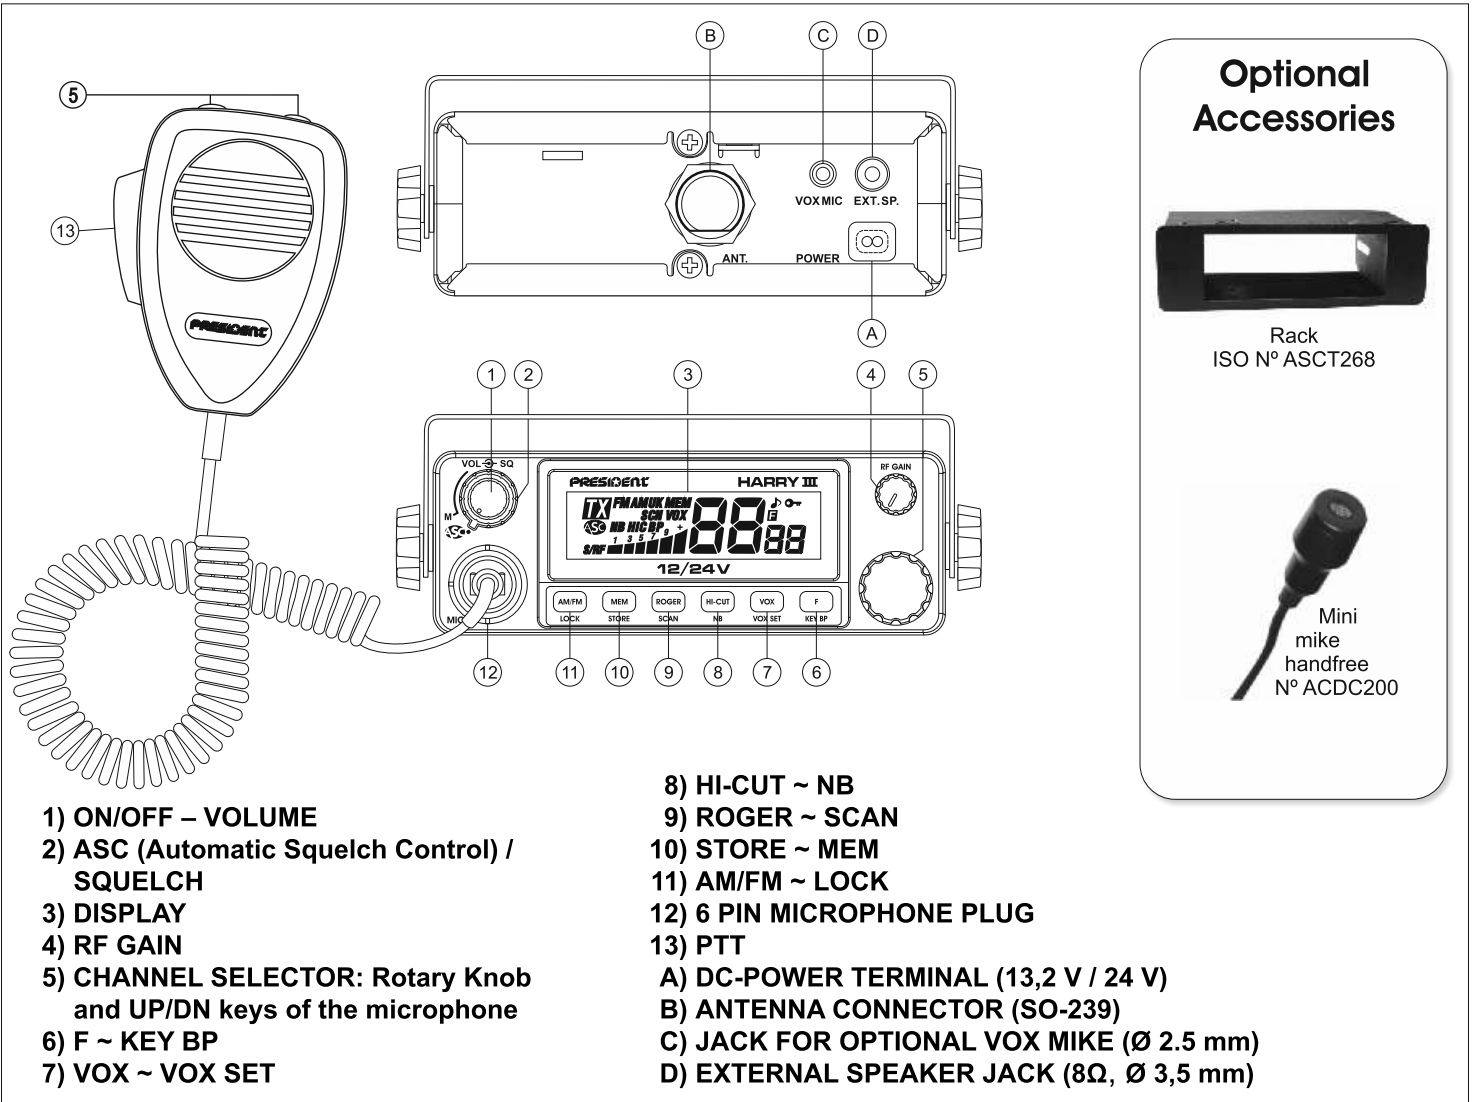

1605/03-15 C0336b

1) GENERAL

- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V / 24 V
- Dimensions (in mm) : 125 (L) x 150 (H) x 45 (D)
- Weight : ~ 0.7 kg
- Accessories supplied : Electret microphone with support, mounting cradle, screws.
- Filter : ANL (Automatic Noise Limiter) built-in

2) TRANSMISSION

- Frequency allowance : +/- 200 Hz
- Carrier power : 1 W AM / 4 W FM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : inferior to 20 µW
- Microphone sensitivity : 7 mV
- Drain : 1.7 A (with modulation)
- Modulated signal distortion : 1.8 %

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 µV - 113 dBm
- Frequency response : 300 Hz to 3 kHz
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 2 W
- Squelch sensitivity : minimum 0.2 µV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 300 mA nominal
750 mA maximum

Specifications

is powered with a batterie 12 or 24 V



all european standards

