

# PRESIDENT

## JERRY FCC

AM / FM

Handheld / Mobile CB with **Essential** Features  
and **Vehicle Charging System**

*Engineered to be the very best*



### FEATURES

- Large multifunction LCD / Frequency display
- Weather channels / Alert function
- Key Beep / Roger Beep
- ANL / NB / Hi-Cut
- ASC / Manual Squelch
- Scan
- 2 Emergency channels (EMG)
- Dual Watch / Lock

- Supplied accessories:
  - Vehicle Charging / Antenna Adapter
  - Flexible antenna S-20
  - Battery pack 1800 mA (Lithium-Ion)
  - Fuse
  - Owner's manual



Art. N° TXUS623




\*See warranty conditions on our website: [www.president-electronics.us](http://www.president-electronics.us)

Group  
**PRESIDENT**  
ELECTRONICS USA

2267/05-24

HEAD OFFICE: USA - 1007 Collier Center Way, Naples, Florida 34110  
Web: <http://www.president-electronics.us> • Phone: +1 239.302.3100  
Email: [info@president-electronics.us](mailto:info@president-electronics.us)



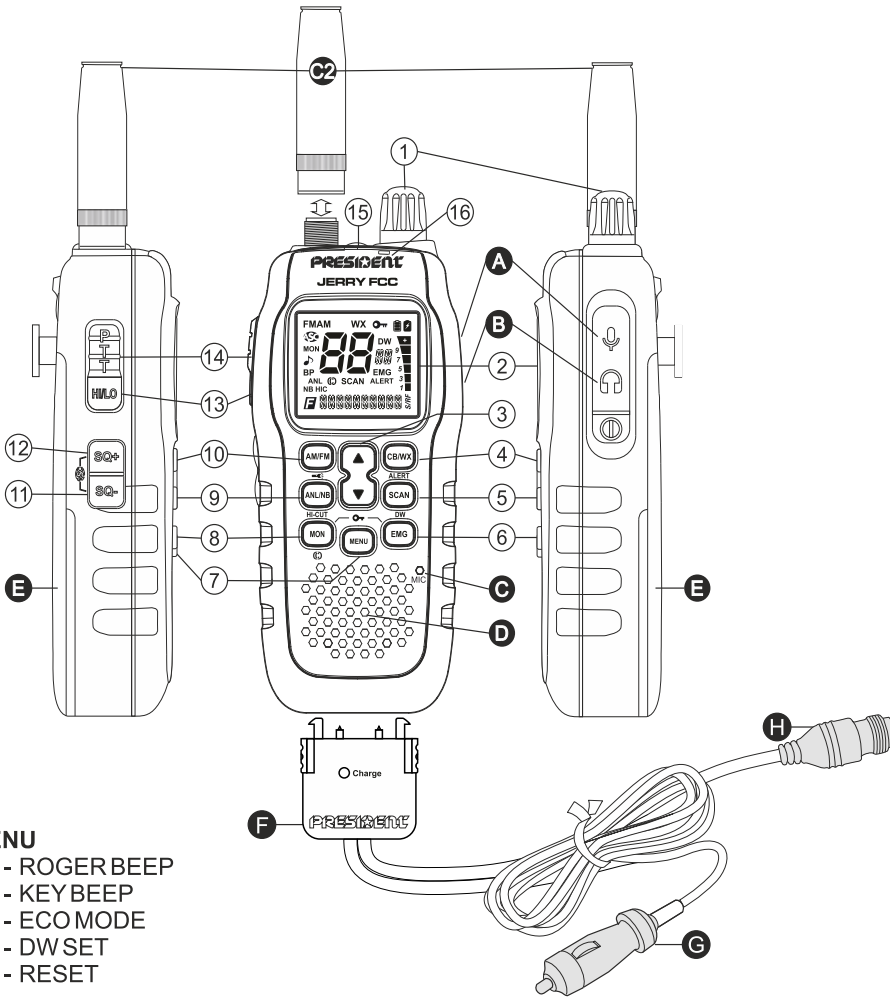

- A) EXTERNAL MICROPHONE PLUG
- B) EXTERNAL SPEAKER PLUG
- C) INTERNAL MICROPHONE
- D) INTERNAL SPEAKER
- E) BATTERY PACK DOOR
- F) VEHICULE CHARGING / ANTENNA ADAPTER
- G) CIGAR LIGHTER PLUG
- H) EXTERNAL ANTENNA PLUG

- 1) ON/OFF ~ VOLUME
- 2) DISPLAY
- 3) CHANNEL SELECTOR
- 4) CB/WX ~ ALERT
- 5) SCAN ~ DW
- 6) EMG
- 7) MENU
- 8) MONITOR
- 9) ANL / NB ~ HI-CUT
- 10) MODE ~ FLASHLIGHT
- 11) MANUAL SQUELCH-
- 12) MANUAL SQUELCH+
- 11 + 12) ASC (Automatic Squelch Control)
- 13) HI/LO TRANSMITTING POWER
- 14) PTT (Push To Talk) ~ TOT (Time Out Timer)
- 15) FLASHLIGHT
- 16) LED
- 6 + 8) LOCK

## MENU

- ROGER BEEP
- KEY BEEP
- ECO MODE
- DW SET
- RESET

## 1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V (mobile configuration)  
7.4 V (portable configuration)
- Dimensions : 5.98 (H) x 2.62 (W) x 1.46 (D) inches  
152 (H) x 66,5 (W) x 37 (D) mm
- Weight (without antenna : 0.67 lb  
and with battery) 305 g
- Supplied accessories : See website.

## 2) TRANSMISSION

- Frequency allowance :  $\pm 200$  Hz
- Carrier power : 4 W
- Transmission interference :  $< 4$  nW (-54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel :  $< 20$   $\mu$ W
- Microphone sensitivity : 7 mV
- Max. drain : 1.8A
- Modul. signal distortion : 2 %

# Specifications

## 3) RECEPTION

- Max. sensitivity at 20 dB sinad : 0.5  $\mu$ V - 113 dBm (AM)  
0.3  $\mu$ V - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 1 W
- Squelch sensitivity : min. 0.2  $\mu$ V - 120 dBm  
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : See owner's manual
- Internal speaker : 16 ohms, 1 W

