PRESIDENT

JACK II

RADIO CB - 12 / 24 V
AM / FM / USB / LSB



FEATURES

- Digital display
- Front-facing speaker / USB type-C / Lock
- NRC / ANL / NB / HIC / NG
- RF PWR / RF GAIN / MIC GAIN
- Vox (Hands-free function)
- 4 programmable memories
- Scan / Scan Skip / DW
- CTCSS/DCS / SPAN
- PA (Public Address)
- S-meter
- Key beep / Roger beep / Talk Back / CALL
- ...



Non-contractual photo

- Supplied accessories:
  - 1 Electret UP/DN microphone
  - 1 Hanger clip
  - 1 Mounting cradle and screws
  - 1 DIN rack
  - 1 PA/HP cable
  - 1 Fused power cord

Art. N° TXPR906

3 435991 106306

Complementary product

Suction cup mounting



«SCAN SKIP» · AUTOMATIC RELAY · P CHANNELS

Compatible REMOTE BT MIKE REMOTE MIKE · VOX built in · ASC Automatic Squelch Control · N.R.C. NOISE REDUCTION CIRCUIT


All european standards · N°1 CB PRESIDENT · 100% RoHS 2 EU norm · MADE BY 100 % QUALITY PRESIDENT · 2+3 years warranty · CE

Groupe PRESIDENT ELECTRONICS since 1978
2376/09-26 - C0548
S.A. Capital 10.000.000 €
Siège Social / Head Office – France – Route de Sète
BP 100 – 34540 BALARUC
Site : http://www.president-electronics.com
e-mail : groupe@president-electronics.com

JACK II

Functions

A) DC-POWER TERMINAL (13.2 V / 26.4 V)
B) ANTENNA CONNECTOR (SO-239)
C) EXTERNAL SPEAKER AND PA SOCKET (8 Ω, Ø 3.5 mm)
D) 1/4" MOUNTING THREAD

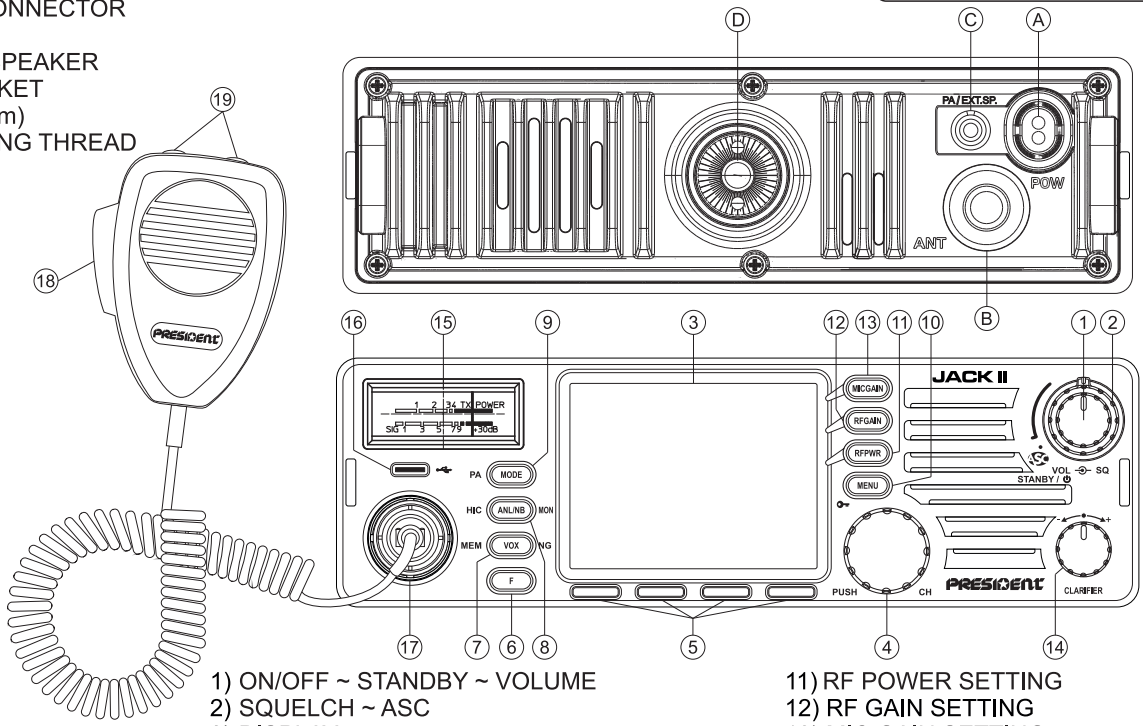

1) ON/OFF ~ STANDBY ~ VOLUME
2) SQUELCH ~ ASC
3) DISPLAY
4) "PUSH" ROTARY KNOB (CH) ~ SPAN
5) MULTIFUNCTION CONTEXTUAL BUTTONS
6) F ~ REPEATER / RELAY ~ T0/T5
7) VOX ~ MEM ~ NG
8) ANL/NB ~ HI-CUT (HIC) ~ MONITOR (MON)
9) MODE ~ PUBLIC ADDRESS
10) MENU ~ KEY LOCK
11) RF POWER SETTING
12) RF GAIN SETTING
13) MIC GAIN SETTING
14) CLARIFIER
15) BAR GRAPH
16) USB TYPE C
17) 6-PIN MICROPHONE SOCKET
18) PTT
19) MICROPHONE UP/DOWN BUTTONS

Specifications

1) GENERAL

- Channels	: 40
- Modulation modes	: AM / FM / USB / LSB
- Frequency range	: 26.965 MHz to 27.405 Mhz
- Antenna impedance	: 50 ohms
- Power supply	: 13.2 V / 26.4 V
- Dimensions (mm)	: 176 (L) x 50 (W) x 50 (H)
- Weight	: ~ 625 g
- Supplied accessories	: Electret UP/DN microphone, hanger clip, mounting cradle and screws, DIN rack, PA/HP cable, fused power cord

2) TRANSMISSION

- Frequency allowance	: ± 200 Hz
- Carrier power	: 4 W (AM / FM) / 12 W PEP (USB/LSB)
- Transmission interference	: < 4 nW (- 54 dBm)
- Audio response	: 300 Hz to 3 Khz
- Emitted power in the adj. channel	: < 20 µW
- Microphone sensitivity	: 3 mV
- Max. drain	: < 2.3 A max. with modulation (13.2 V) < 1.3 A max. with modulation (26.4 V)
- Modul. signal distortion	: 2 %

3) RECEPTION

- Max. sensitivity at 20 dB sinad	: 0.5 µV - 113 dBm (AM) 0.35 µV - 116 dBm (FM) 0.28 µV - 118 dBm (FM)
- Frequency response	: 300 Hz to 3 kHz
- Adj. channel selectivity	: 60 dB
- Max. audio power	: 3 W
- Squelch sensitivity	: min. 0.2 µV - 120 dBm max. 1 mV - 47 dBm
- Frequency image rejection rate	: 60 dB
- Intermediate frequency rejection rate	: 70 dB
- Max. drain	: 210 ~ 620 mA max. (13.2 V) 110 ~ 310 mA max. (26.4 V)

2376/09-26 - C0548b